
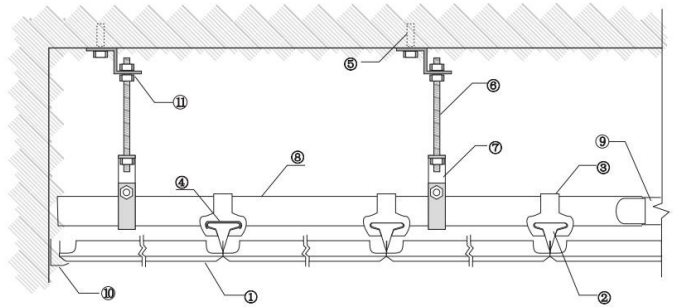
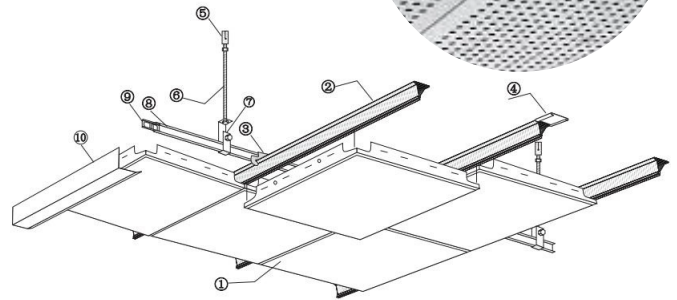




# Suspension System CLIP-IN

## BENEFITS:

- Hot dipped galvanized coating inhibits red rusting better than electrogalvanized.
- System is engineered and designed to fit and provide high quality finish.
- Main Tee easy profile for installation with Cross Tee.
- Increased strength and stability for improved performance.
- Easy to cut.
- Rotary stitched for additional torsional strength and extra stability during installation.
- Faster and easier insertion/installation of cross tees.
- Tighter tee to tee connection.
- Better load carrying capability.

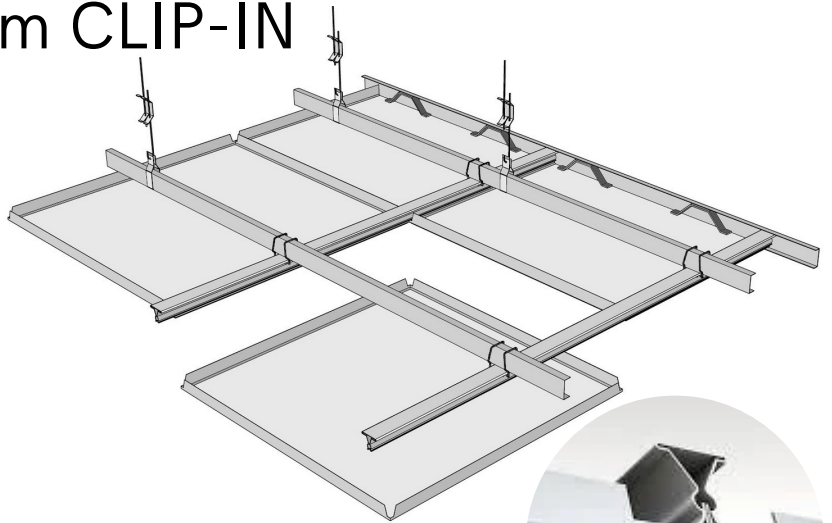

Code	Type	Dimension
BAC 45	38# GA.20 Rolled Channel	1 1/2" x 144"
	Tee Carrier	1 1/2" x 120"
Wall Molding	L shape	7/8" x 7/8" x 142"



- |  |                                       |                          |
|--|---------------------------------------|--------------------------|
| 1 Closed frame ceiling                 | 5 Expansion screw (opt)               | 9 38# main carrier (opt) |
| 2 Spring tee runner                    | 6 Suspension bolt (opt)               | 10 L-shape angle (opt)   |
| 3 Spring tee runner suspension bracket | 7 38# Main carrier suspension bracket |                          |
| 4 Spring tee runner carrier connector  | 8 38# Main carrier (opt)              |                          |

### COLOR CHART



PHYSICAL DATA	
Type	38 H – Heavy Duty Suspension System
Intended use	As a support system in conjunction with various types of Benner Ceiling Tiles and other brands.
End detail	Main tee (12' / HD) Cross Tee (2' / 4' / HD) Wall Angle (HD)
Seismic performance	Compression / tension Main beam – 365 / 7 Cross Tee – 299 / 5
Materials	Components in general galvanized steel cap Fire rated commercial conditions Hot – dipped galvanized steel body
Requirements	Meets with all international code including seismic. Complies with ASTM C635
Application	Applicable to various types of buildings and/or mayor brand ceiling tiles