

FLOORS



LVT VINYL STAFF


VCT VINYL TILE



**BENNER
PRODUCTS**

LVT VINYL STAFF

Dream wood / High wood

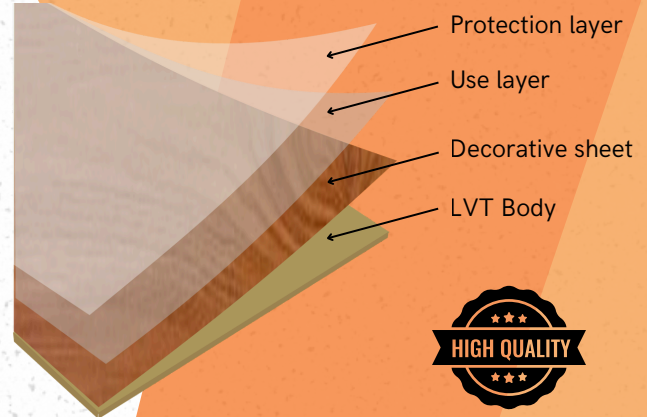

Easy Installation



Resistant




Light Weight



Maintenance easy


Description	Duela Dream Wood	Duela High Wood
Size	30.48 x 91.44 cm (12" x 36")	
Thickness	3.0 mm	
Weight	5.09 Kg / m2 14.20 kg / box	
Packing	10 pieces 2.79 m2 / box	
Wear layer	0.30 mm	0.50 mm
Adhesive	Contact	
Durability	5 - 10 - 15 Years According to protective layer, thickness and use	

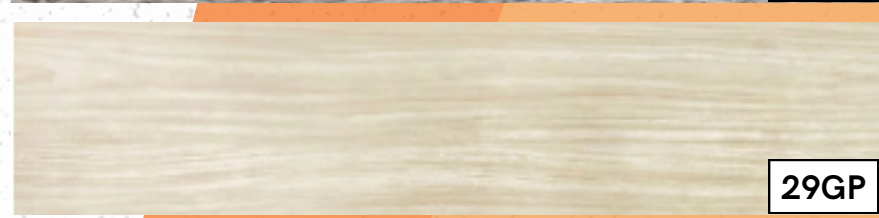

- The material must be placed on a flat, uniform and level surface, without irregularities, free of dust, grease and dirt. The maximum humidity of the installation surface is 3%.
- The thickness and protective layer depends on the needs of the client.
- Stave with engraving.
- Designed for heavy traffic such as gyms, cinemas, offices, stores, etc.
- It should not be polished.
- No solvent should be applied.

LVT VINYL STAFF

Exotic wood

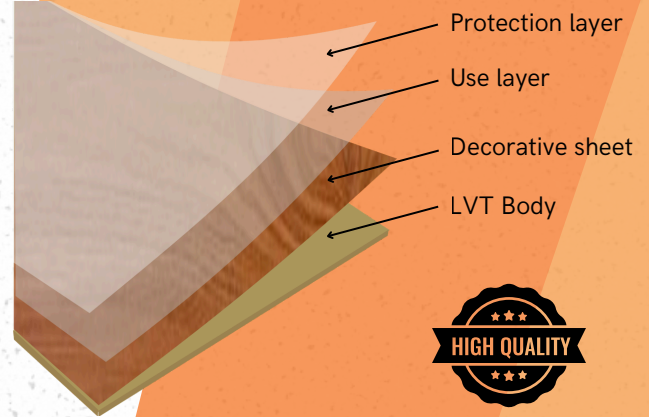

Easy Installation



Resistant



Light Weight



Maintenance easy

★ means in stock

Description	Duela Exotic Wood
Size	15.24 x 91.44 cm (6"x36")
Thickness	2.0 mm
Weight	3.41 kg/m ² 11.40 kg x box
Packing	24 Pieces 3.34 m ² x box
Wear layer	0.20 mm
Adhesive	Contact
Durability	5 - 10 - 15 Years <small>According to protective layer, thickness and use</small>

- The material must be placed on a flat, uniform and level surface, without irregularities, free of dust, grease and dirt. The maximum humidity of the installation surface is 3%.
- The thickness and protective layer depends on the needs of the client.
- Stave with engraving.
- Designed for heavy traffic such as gyms, cinemas, offices, stores, etc.
- It should not be polished.
- No solvent should be applied.



06GP

09GP

11GP


29GP

33GP ★

38GP ★

LVT VINYL STAFF

Style wood

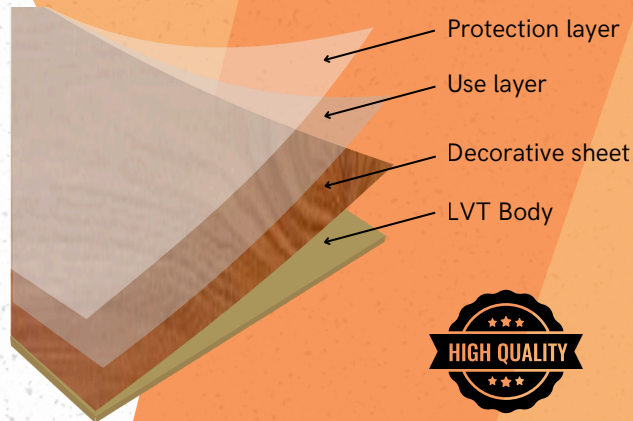

Easy Installation



Resistant



Light Weight



Maintenance easy


Description	Duela Style Wood
Size	15.24 x 91.44 cm (6"x36")
Thickness	1.4 mm
Weight	2.55 kg/m ² 14.20 kg x box
Packing	40 Pieces 5.57 m ² x box
Wear layer	0.15 mm
Adhesive	Contact
Durability	5 - 10 - 15 Years <small>According to protective layer, thickness and use</small>

- The material must be placed on a flat, uniform and level surface, without irregularities, free of dust, grease and dirt. The maximum humidity of the installation surface is 3%.
- The thickness and protective layer depends on the needs of the client.
- Stave with engraving.
- Designed for heavy traffic such as gyms, cinemas, offices, stores, etc.
- It should not be polished.
- No solvent should be applied.



LVT VINYL STAFF

Imported wood

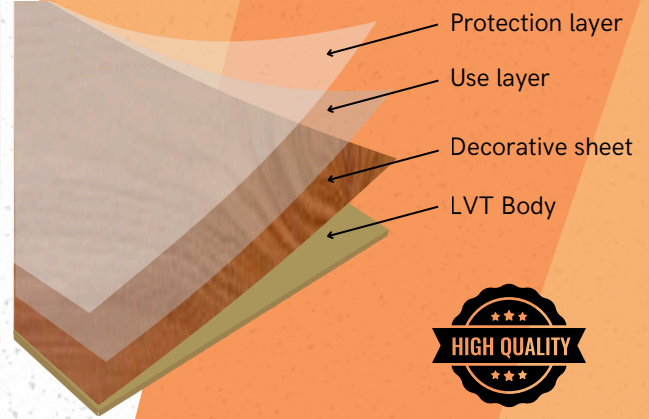

Easy Installation



Resistant





Light Weight




Maintenance easy

Description	Duela Imported Wood		
Size	22.86 cm x 121.92 cm (9" x 48")	22.86 cm x 121.92 cm (9" x 48")	30.48 cm x 60.96 cm (12" x 24")
Thickness	1.5 mm	3.0 mm	3.0 mm
Weight	2.89 kg/m ² 14.5 kg x box	5.73 kg/m ² 16 kg x box	5.38 kg/m ² 10 kg x box
Packing	18 Pieces 5.02 m ² x box	10 Pieces 2.79 m ² x box	10 Pieces 1.86 m ² x box
Wear layer	0.12 mm	0.30 mm	0.30 mm
Adhesive	Contact	Contact	Contact
Durability	5 - 10 - 15 Years According to protective layer, thickness and use	5 - 10 - 15 Years According to protective layer, thickness and use	15 Years According to protective layer, thickness and use

- The material must be placed on a flat, uniform and level surface, without irregularities, free of dust, grease and dirt. The maximum humidity of the installation surface is 3%.
- The thickness and protective layer depends on the needs of the client.
- Stave with engraving.
- Designed for heavy traffic such as gyms, cinemas, offices, stores, etc.
- It should not be polished.
- No solvent should be applied.

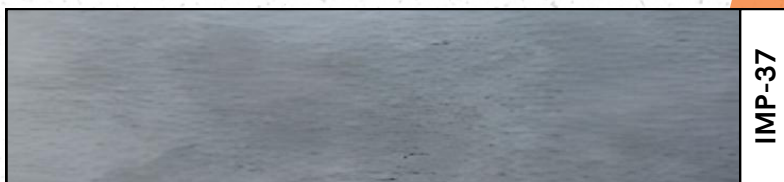

VCT VINYL TILE

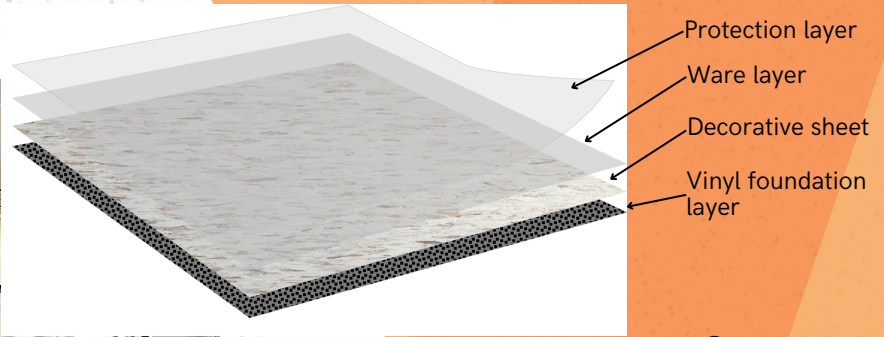

Easy Installation



Resistant



Light Weight



Maintenance easy

Description	Vinyl Tile				
Size	30.48 cm x 30.48 cm (12"x12")			45.72 cm x 45.72 cm (18"x18")	
Thickness	1.3 mm	1.6 mm	3.1 mm	1.6 mm	3.1 mm
Weight	2.72 kg/m ² 27.2 kg x box	3.20 kg/m ² 13.37 kg x box	6.76 kg/m ² 28.23 kg x box	3.20 kg/m ² 13.37 kg x box	6.76 kg/m ² 28.25 kg x box
Packing	108 Pieces 10.03 m ² x box	3.20 kg/m ² 13.37 kg x box	6.76 kg/m ² 28.23 kg x box	20 Pieces 4.18 m ² x box	20 Pieces 4.18 m ² x box
Adhesive	Latex				
Model	Alabastro Erernolux Vis Madeiras Mármol Parquet Tradicional	Century Eternolux Onyx Royal Sahara Sólida	Century Eternolux Onyx Royal Royal Colors Royal Plus Sahara Sólida	Carrara	

Maintenance:


- All you need is water, soap or some liquid floor cleaner.
- It can also be polished, resulting in a new floor appearance.
- It can be installed with special latex glue for tile, also with contact glue *depending on the humidity of the surface is how the appropriate adhesive is chosen for installation, that is, if there is excess humidity, it is advisable to use latex glue.

Benefits:



- Easy installation. If any piece is damaged, it can be replaced without having to remove the entire floor.
- Slip-resistant and easy to maintain.
- Self-extinguishing.
- Thermal and acoustic insulation.
- Very lightweight materials that comply with new lightweight construction standards.

VCT VINYL TILE

ALABASTER






CARRARA




★ means in stock

CENTURY



VCT VINYL TILE

ETERNOLUX



210



215

MADEIRAS



160



161

MARMOL



500



502

ONYX



750



752






756

VCT VINYL TILE



PARQUET





ROYAL



SAHARA






SOLIDA





VCT VINYL TILE

ROYAL COLOR




★ means in stock

ROYAL PLUS



TRADICIONAL



VCT VINYL TILE



Easy Installation



Resistant



Light Weight



Maintenance easy

Description	Best Regal
Size	30.48 cm x 30.48 cm (12" x 12")
Thickness	3.1 mm
Weight	6.65 kg/m ² 27.8 kg
Packing	45 pieces 4.18 m ² / box
Adhesive	Latex



BEST-150602




BEST-150612




BEST-150679



BEST-150637

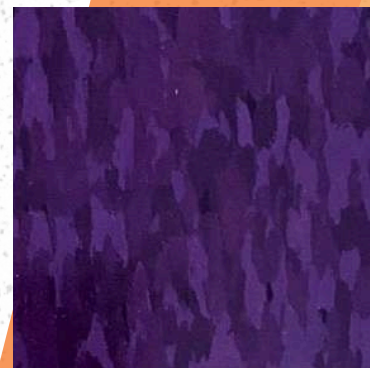

BEST-150644

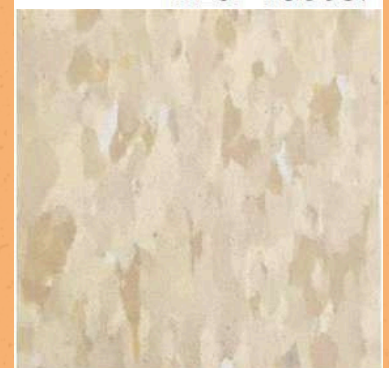

BEST-150667

Maintenance:

- All you need is water, soap or some liquid floor cleaner.
- It can also be polished, resulting in a new floor appearance.
- It can be installed with special latex glue for tile, also with contact glue *depending on the humidity of the surface is how the appropriate adhesive is chosen for installation, that is, if there is excess humidity, it is advisable to use latex glue.

Benefits:

- Easy placement. If any part is damaged, it can be changed without having to lift the entire floor.
- Non-slip and easy maintenance.
- Self-extinguishing.
- Thermal and acoustic insulation.
- Very light materials that adapt to the new lightweight construction standards.

VCT VINYL TILE



BEST-150670



BEST-150689



BEST-150688



BEST-150627



BEST-150628



BEST-150629



BEST-150631



BEST-150633



BEST-150643



BEST-150641



BEST-150645




BEST-150613



BEST-150622



BEST-150623

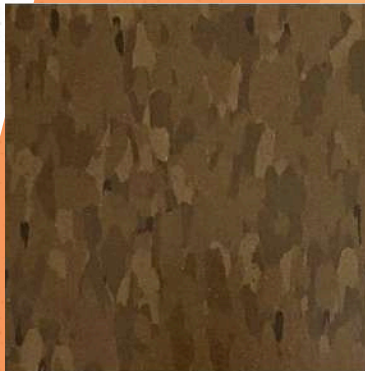

BEST-150619